





2K EPOXY TOP COAT DTM

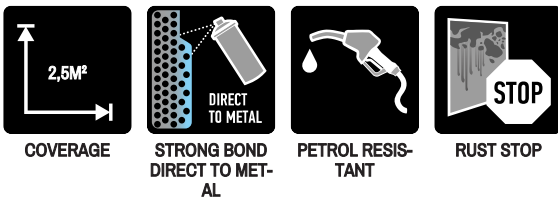


CAR-REP® 2K EPOXY TOP COAT DTM is revolutionary 2-component coating in 1-compartment can. Forms the hardest water and airtight coating. Easy application and high coverage up to 2.5 m² (27 sq ft). The only 2K with no mixing & unlimited potlife, use till can finished. Provides strong bond and superior corrosion resistance, when applied direct to metal. No primer needed. Car-Rep® 2K Top Coats can be applied outside spray booths, which is time and cost-efficient.

MATERIAL

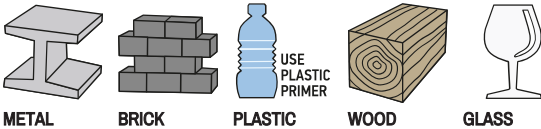

PRODUCT HIGHLIGHTS

- Original 2K quality with revolutionary WISE 2K™ technology
- Revolutionary long potlife: Whole product can be used with no wasted paint
- Always ready-to-use: No activation required
- Superior adhesion and chemical resistance
- Extreme anti-corrosion



PRIOR TO APPLICATION

- Shake cans well – no less than 2 minutes.
- Storing cans upside down is recommended. Shake any products with white pigments upside down and shake longer prior to pressing the nozzle.
- Application environment : Temperature 20C/68F to 35-75% humidity. In dry conditions please add humidity by spritzing water in the air or by using a humidifier.

HARDNESS



APPLICATION



1. Metal or existing surface prepped with 180 to 320 grit
2. Clean metal with solvent cleaner and plastic with waterborne/plastic cleaner
3. No primer needed on metal, apply DIRECT TO METAL: No adhesion promotor needed or recommended on plastic
4. Apply 3 coats – light/medium coat with 5 minute flash, medium/wet coat with 5 minute flash and wet coat
5. Colors such as Yellow and White – apply 2 or 3 light mist coats to get color coverage with 5 minute flash each coat, medium coat, 5 minute flash, wet coat
6. Looking for even coverage on 2nd and 3rd coat

7. 8 to 10 inches spray distance from subject
8. No clear coat needed
9. Turn can upside down when finished pressing nozzle for clearing product from nozzle and wipe off any residue from spray tip

CHARACTERISTICS

- Single stage (DTM) no primer or adhesion promotor needed
- Great coverage
- Extremely durable once cured
- Excellent adhesion to most substrates
- Continues to flow and smooth out after last coat
- Replacement for 1k trim paint or Hot Rod Black
- UV protection
- Out of dust – 30 minutes
- Handle time – 1 to 2 hours
- Full Cure time – 14 to 21 days
- Perfect for wheels, engine bays, suspension parts, engine blocks, interior parts, backs of panels, ect
- Washing with water or soap not recommended for at least 14 days after spraying

WISE 2K® TECHNOLOGY

Wise 2K® is a patented 2-component aerosol paint technology, which delivers a revolutionary unlimited potlife. Both Wise 2K® epoxy and polyurethane technologies feature a deactivated hardener and resin in a single compartment can and they require no activation or mixing, you can simply shake and spray. No reaction takes place inside the can; instead there are 2 reactions when the products are sprayed. First, the deactivated hardener reactivates when it meets atmospheric pressure with humidity in the air, which is then followed by the components crosslinking and creating carbon to carbon bridges. Wise 2K® is a true 2-component technology and delivers the same performance characteristics as any other: maximum adhesion and corrosion, chemical, UV and scratch resistance. Wise 2K® is not to be confused with moisture curing, which is a 1-component technology.

Wise 2K® products can be used repeatedly until the can is empty without the fear of premature hardening in the can making them ideal for spot repair and small/medium sized objects.

DEGREE OF GLOSS (DIN 67530 60 °):

matt 0-25 gloss units
satin 35-50 gloss units
gloss 80-100 gloss units

HEAT RESISTANCE: 150°C



















STORAGE STABILITY: 18 months

SIZE: 400ml

SALES QTY:

400ml: 6 pcs

CAR-REP 2K Epoxy Top Coat DTM

Art. No.	CAR-REP 2K Epoxy Top Coat DTM	Color	Barcode
C237016	NA Spraypaint Car-Rep 2K Anthracite Grey RAL7016 400ml		6412490043278
C236005	NA Spraypaint Car-Rep 2K British Racing Green RAL6005 400ml		6412490046651
C230010	NA Spraypaint Car-Rep 2K Caterpillar Yellow 400ml		6412490030131
C233000	NA Spraypaint Car-Rep 2K Flame Red RAL3000 400ml		6412490043247
C230050	NA Spraypaint Car-Rep 2K Kubota orange 400ml		6412490030162
C235010	NA Spraypaint Car-Rep 2K Gentian Blue RAL5010 400ml		6412490043254
C239005	NA Spraypaint Car-Rep 2K Jet Black Gloss RAL9005 400ml		6412490043285
C239005M	NA Spraypaint Car-Rep 2K Jet Black Matte RAL9005 400ml		6412490043292
C239005S	NA Spraypaint Car-Rep 2K Jet Black Satin RAL9005 400ml		6412490043308
C230060	NA Spraypaint Car-Rep 2K John Deere Green 400ml		6412490030179
C230020	NA Spraypaint Car-Rep 2K Kubota orange 400ml		6412490030155
C232004	NA Spraypaint Car-Rep 2K Pure Orange RAL2004 400ml		6412490043230
C239010	NA Spraypaint Car-Rep 2K Pure White RAL9010 400ml		6412490043322
C236011	NA Spraypaint Car-Rep 2K Reseda Green RAL6011 400ml		6412490043261
C230011	NA Spraypaint Car-Rep 2K Schoolbus Yellow 400ml		6412490030148
C230070	NA Spraypaint Car-Rep 2K Stone Grey 400ml		6412490030377
C231018	NA Spraypaint Car-Rep 2K Zinc Yellow RAL1018 400ml		6412490047870
C239006	NA Spraypaint Car-Rep 2K White Aluminium RAL9006 400ml		6412490043315